

SECM243-S1.0A-1

2-Phasen-Schrittmotor

[1,8° High-Torque-Version]

Model A = Single Shaft B = Double Shaft	Bipolar Seriell				Unipolar				Speed Torque
	Holding Torque [Nm	Current / Phase [A]	Resistance / Phase [Ohm]	Inductance / Phase [mH	Holding Torque [Nm	Current / Phase [A]	Resistance / Phase [Ohm]	Inductance / Phase [mH	
SECM243-S1.0A-1	0.21	0.67	8.4	11.2	0.16	0.95	4.2	2.8	D1

Number of Leads	Weight of Motor	Size Length	Rotor Inertia
S = 6	0.2 kg	33 mm	35 x 10 $^{-7}$ kgm²

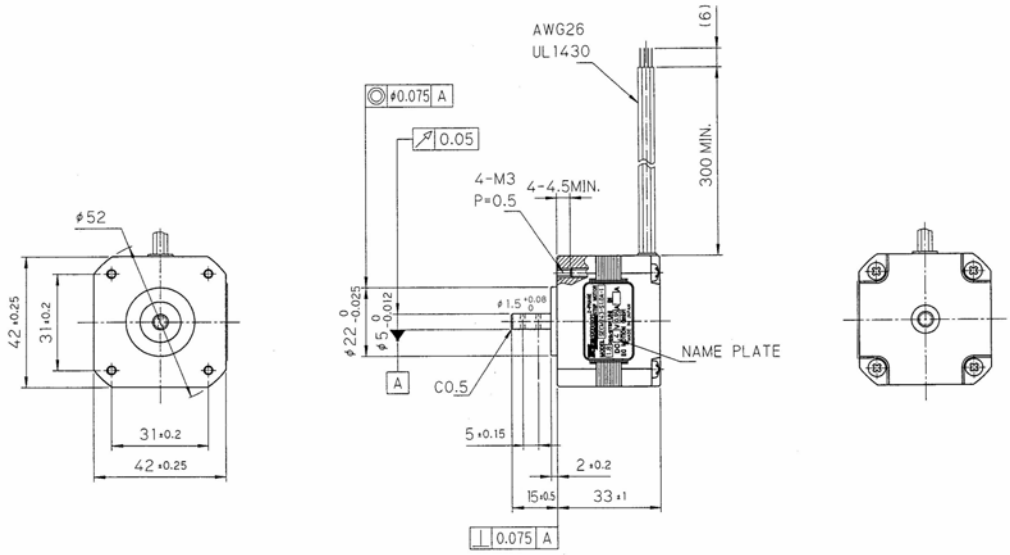

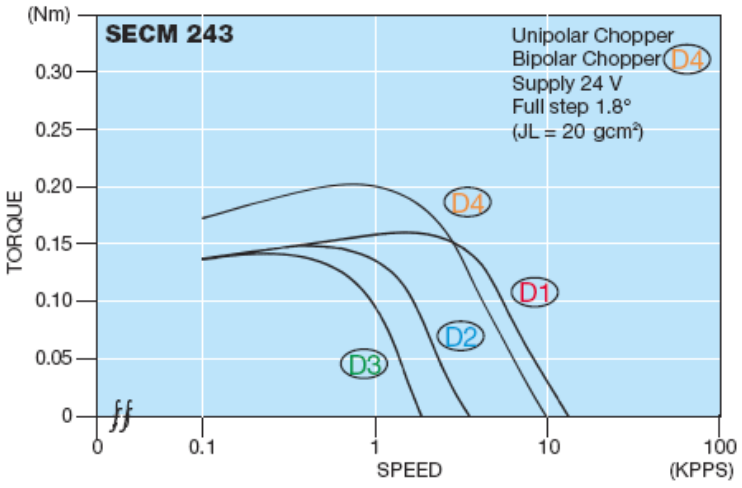



Version 05/12

EC Motion GmbH - Auf den Steinen 20 - 41812 Erkelenz
Tel.: +49 (0)2164-7014-0 - Fax. : +49 (0)2164-701419
Internet: www.ec-motion.de - e-mail: info@ec-motion.de