

## Bremse BRK26H - Technische Daten

Spannung: 24 VDC  
Leistung: 9.5 W  
Bremsmoment: 3.3 Nm  
Spulenwiderstand: 47.3 up to 55.8 Ohm  
Einschaltdauer: 50%  
Gewicht: 0.45 kg

## Schrittmotor - Technische Daten


Länge (L):

HECM264...B = 43.5 mm  
HECM266...B = 54 mm  
HECM267...B = 65 mm  
HECM269...B = 85 mm

Haltemoment:

HECM264...B = 1.15 Nm  
HECM266...B = 1.82 Nm  
HECM267...B = 2.35 Nm  
HECM269...B = 3.30 Nm

weitere Daten siehe Schrittmotordatenblatt

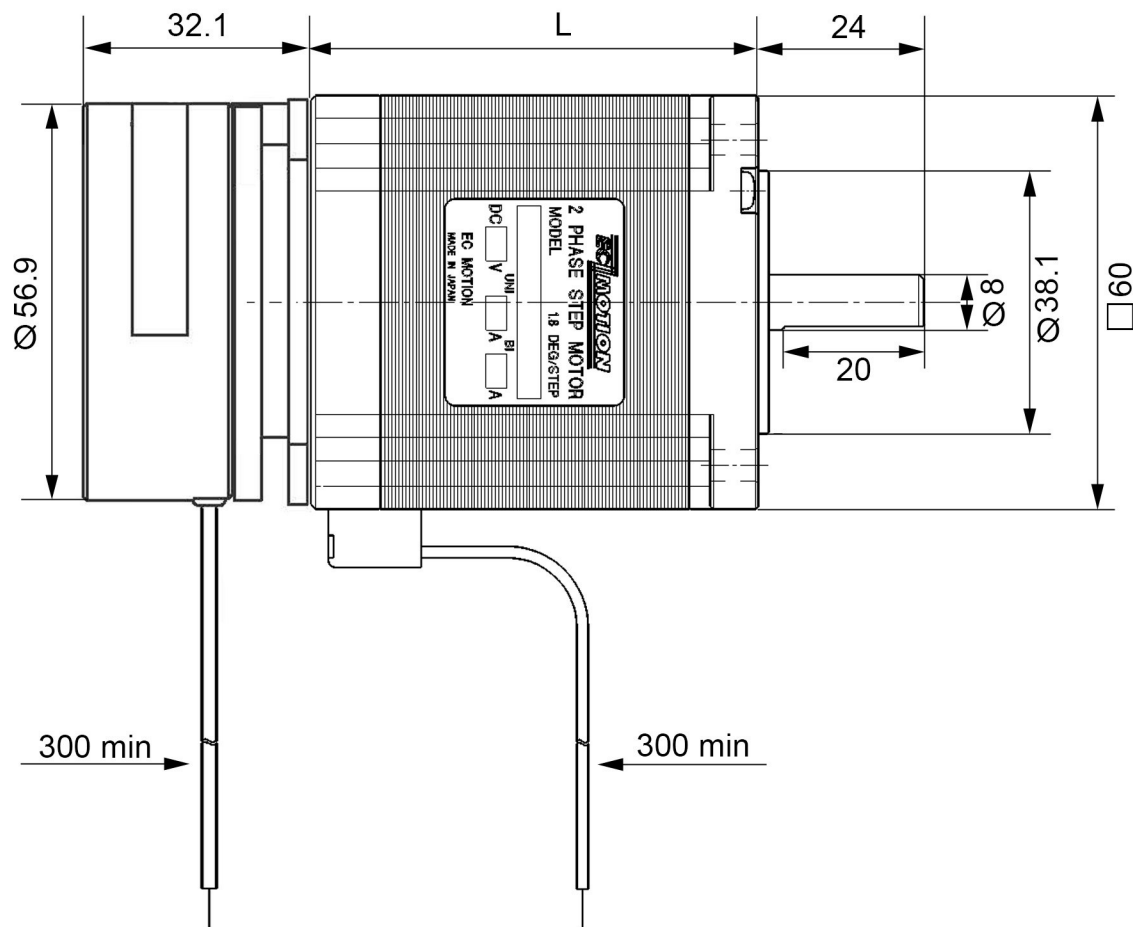

**EC**MOTION

Glockensprung (neu) 8  
41812 Erkelenz  
Tel.: +49-2431-94206-0  
www.ec-motion.de - info@ec-motion.de

**HECM26-Serie**

**Schrittmotoren mit  
elektromagnetischer Bremse**

Version 06/21

# STEPPING MOTORS

## □ 60 mm HECM-SPECIFICATIONS

### 1.8° HIGH-TORQUE 2 PHASE STEPPING MOTOR

Model A = Single Shaft B = Double Shaft	● Bipolar Parallel				● Bipolar Serial				● Unipolar				Torque Speed- curve
	Holding Torque [Nm]	Current/ Phase [A]	Resistance/ Phase [Ohm]	Inductance/ Phase [mH]	Holding Torque [Nm]	Current/ Phase [A]	Resistance/ Phase [Ohm]	Inductance/ Phase [mH]	Holding Torque [Nm]	Current/ Phase [A]	Resistance/ Phase [Ohm]	Inductance/ Phase [mH]	
HECM264-E2.0 (A/B)	1.15	2.8	0.73	2.1	1.15	1.4	2.9	8.4	0.85	2.0	1.45	2.1	(A1)
HECM264-E3.0 (A/B)	1.15	4.2	0.33*	1.0	1.15	2.1	1.3*	4.0	0.85	3.0	0.65*	1.0	(A2)

Number of Leads	Weight of Motor	Size Length	Rotor Inertia
8	0.6 kg	60 x 60 x 43,5 mm	280 x 10 <sup>-7</sup> kgm <sup>2</sup>

Resistance / Phase (Ω) = ± 10%, (\* ± 15%), Inductance / Phase (mH) = ± 20%

Model A = Single Shaft B = Double Shaft	● Bipolar Parallel				● Bipolar Serial				● Unipolar				Torque Speed- curve
	Holding Torque [Nm]	Current/ Phase [A]	Resistance/ Phase [Ohm]	Inductance/ Phase [mH]	Holding Torque [Nm]	Current/ Phase [A]	Resistance/ Phase [Ohm]	Inductance/ Phase [mH]	Holding Torque [Nm]	Current/ Phase [A]	Resistance/ Phase [Ohm]	Inductance/ Phase [mH]	
HECM266-E2.0 (A/B)	1.82	2.8	1.0	3.8	1.82	1.4	4.0	15.2	1.35	2.0	2.0	3.8	(B1)
HECM266-E3.0 (A/B)	1.82	4.2	0.43*	1.6	1.82	2.1	1.7*	6.4	1.35	3.0	0.85*	1.6	(B2)

Number of Leads	Weight of Motor	Size Length	Rotor Inertia
8	0.85 kg	60 x 60 x 54 mm	450 x 10 <sup>-7</sup> kgm <sup>2</sup>

Resistance / Phase (Ω) = ± 10%, (\* ± 15%), Inductance / Phase (mH) = ± 20%

Model A = Single Shaft B = Double Shaft	● Bipolar Parallel				● Bipolar Serial				● Unipolar				Torque Speed- curve
	Holding Torque [Nm]	Current/ Phase [A]	Resistance/ Phase [Ohm]	Inductance/ Phase [mH]	Holding Torque [Nm]	Current/ Phase [A]	Resistance/ Phase [Ohm]	Inductance/ Phase [mH]	Holding Torque [Nm]	Current/ Phase [A]	Resistance/ Phase [Ohm]	Inductance/ Phase [mH]	
HECM267-E2.4 (A/B)	2.35	3.5	0.75	3.1	2.35	1.75	3.0	12.4	1.75	2.45	1.5	3.1	(C1)
HECM267-E3.0 (A/B)	2.35	4.2	0.5*	2.0	2.35	2.1	2.0*	8.0	1.75	3.0	1.0*	2.0	(C2)

Number of Leads	Weight of Motor	Size Length	Rotor Inertia
8	1.1 kg	60 x 60 x 65 mm	570 x 10 <sup>-7</sup> kgm <sup>2</sup>

Resistance / Phase (Ω) = ± 10%, (\* ± 15%), Inductance / Phase (mH) = ± 20%

Model A = Single Shaft B = Double Shaft	● Bipolar Parallel				● Bipolar Serial				● Unipolar				Torque Speed- curve
	Holding Torque [Nm]	Current/ Phase [A]	Resistance/ Phase [Ohm]	Inductance/ Phase [mH]	Holding Torque [Nm]	Current/ Phase [A]	Resistance/ Phase [Ohm]	Inductance/ Phase [mH]	Holding Torque [Nm]	Current/ Phase [A]	Resistance/ Phase [Ohm]	Inductance/ Phase [mH]	
HECM269-E2.4 (A/B)	3.30	3.5	1.0	5.0	3.30	1.75	4.0	20.0	2.45	2.45	2.0	5.0	(D1)
HECM269-E3.0 (A/B)	3.30	4.2	0.65*	3.2	3.30	2.1	2.6*	12.8	2.45	3.0	1.3*	3.2	(D2)

Number of Leads	Weight of Motor	Size Length	Rotor Inertia
8	1.45 kg	60 x 60 x 85 mm	900 x 10 <sup>-7</sup> kgm <sup>2</sup>

Resistance / Phase (Ω) = ± 10%, (\* ± 15%), Inductance / Phase (mH) = ± 20%

## TORQUE VS. SPEED CHARACTERISTIC

Nm/KPPS (1000 PULSE/SECOND)

## DIMENSIONS

UNIT = mm

