





SECM569... Series 5-Phase-Stepping Motor [0,72° High-Torque-Version]

Model A = Single B = Double Shaft	Full Step Angle	Holding Torque (Ncm)	Current/ Phase (A)	Resistance/ Winding (Ω)	Inductance/ Winding (mH)	Voltage DC (V)	Torque/ Speed	
SECM 569 - T 1.4 A SECM 569 - T 1.4 B	0.72°	166	1.40	1.8	7.5	2.5	e	
SECM 569 - T 2.8 A SECM 569 - T 2.8 B	0.72°	166	2.80	0.65	2.5	1.8	Ð	
Number of Leads	Weight (Kg)		Size Length (mm)			Rotor Inertia (gcm²)		
10	1.2			60x60x86.5			440	

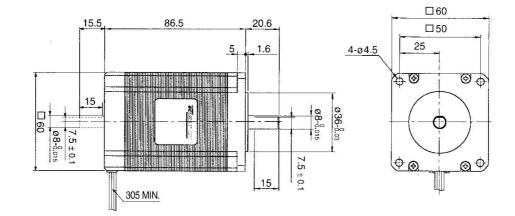

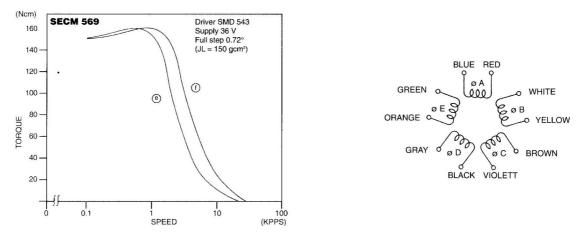

As options, we deliver Encoder and / or Planetary Gears for our Stepping Motors.

EC Motion GmbH - Glockensprung (neu) 8 - D-41812 Erkelenz Tel.: +49-2431-94206-0 - E-Mail: info@ec-motion.de Internet: www.ec-motion.de